

# Supergen 15SX

Quiet Running Booster Pump



## Description

**Application : Suitable for boosting hot or cold water, ideal for kitchen tap boosting.**

A professional pump range with single head impeller and low speed induction motor (1450 rpm). This increases the life of the pump and provides an exceptionally quiet run without compromising on performance.

Supergen is produced in the UK for quiet, effective boosting. They are designed in the regenerative style which means that the pumps are more forgiving in an installation - they can handle hotter water, overcome air pockets and provide a highly efficient flow rate.


The Supergen 15SX has a specially designed impeller that aids the removal of air generated in the system. With automatic thermal overload protection, meaning the pump motor will cut out to prevent overheating, resetting automatically within 30 - 60 minutes..

Supplied with two stainless steel braided flexibles with 15mm or 22mm connections, 1.5m power cable and rubber feet for further noise absorption. Pre-wired and tested for optimum performance.

The Supergen range is not suitable for use with pressurised cylinders, combination boilers or for connecting directly to the mains supply.

The Supergen models below are suitable for positive single head, gravity fed applications. The pump is fitted with a flow switch that requires 0.5 lpm to activate it. If this minimum flow is not available, the Supergen Universal models are recommended.

For sizing advice, please contact our office for assistance.

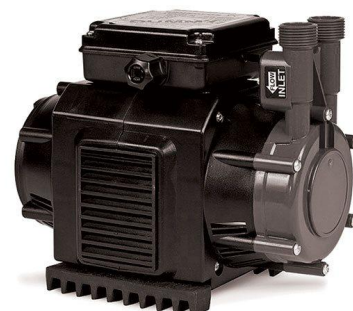

## Specification

<b>Product Code</b>	<b>P2058</b>
<b>Pump Type</b>	Positive Single
<b>Max Pressure</b>	1.5 Bar
<b>Typical Performance</b>	6 lpm at 1.0 Bar
<b>Connection</b>	15 mm <b>22 mm (P2060)</b>
<b>Dimensions of Pump L x W x H (mm)</b>	230 x 140 x 190