



PRODUCT DATA SHEET

OP - 2PORTH

2 PORT MOTORISED VALVE

ACTUATOR TO FIT OPTIMUM VALVES


OP-2PORT (22MM)

OP-2PORT28 (28MM)



THE OP-2PORT IS A 2-PORT MOTORISED VALVE, SUPPLIED WITH 22MM COMPRESSION FITTINGS, FOR FLOW CONTROL OF CENTRAL HEATING OR HOT WATER IN 'S PLAN' CENTRAL HEATING SYSTEMS. THE VALVE OPERATES IN CONJUNCTION WITH EITHER A ROOM OR CYLINDER THERMOSTAT; OPENING ON THERMOSTAT DEMAND SIGNAL BY THE ACTION OF A GEARED SYNCHRONOUS MOTOR, AND CLOSING BY A SPRING RETURN MECHANISM. WHEN OPENED A LIMIT SWITCH OPERATES TO SWITCH ON THE HEAT SOURCE. MUST BE INSTALLED ACCORDING TO THE DIRECTION OF FLOW AS INDICATED BY THE ARROW ON THE VALVE BODY. ONLY SUITABLE FOR OPEN VENTED OR SEALED PUMPED SYSTEMS

CONNECTION	5 CORE COLOUR CODED FLEXIBLE CABLE 1 METRE
POWER CONSUMPTION	6W
TEMPERATURE RANGE	5 TO 88 ^o C
MAX DIFFERENTIAL PRESSURE	1 BAR
MAX STATIC PRESSURE	10 BAR
MAX FLUID TEMPERATURE	100 ^o C
MANUAL LEVER	YES
REPLACEABLE ACTUATOR HEAD	YES
REPLACEABLE MOTOR	YES

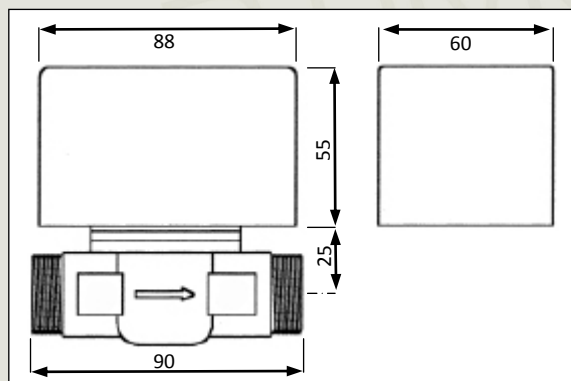

OPTIMUM



Cert No: RS 30178
QR057

TFC GROUP LLP, TOWER HOUSE, VALE RISE, TONBRIDGE, KENT TN9 1TB

Tel: 01732 351680 www.tfc-group.co.uk

Prepared for TFC Group LLP By: M. Edmonston

Issue 1: Sept 2018

Page 1 of 1